







KNOCKDOWN THE FLAMES



- 1 AIR VENTING SYSTEM helps keep feet cooler, drier
- 2 StedAir® WATERPROOF. **BREATHABLE** membrane
- **ANKLE LOCK SYSTEM** keeps ankle firmly in place
- 4 PORON® XRD™ ANKLE PROTECTION
- 5 HEEL KICK PLATE for easy doffing
- 6 Moisture-wicking REMOVABLE FOOTBED on reinforced Bi-Fit™ insole platform molds to the shape of your foot
- 7 Thorogood's Exclusive Vibram® FIRE and ICE ATS - ALL-TERRAIN SOLE
- 8 SIDE WALL LUGS allow for better traction on pitched roofs. embankments and inclined surfaces
- 9 Non-metallic COMPOSITE SAFETY TOE

Hazmat CFRTIFIFD NFPA 1992







14" Knockdown Elite Structural Bunker Boot

- » Waterproof, flame/cut/abrasion-resisting leather, rubber toe and heel protection
- » Cement construction
- » StedAir® PTFE waterproof barrier, blood-borne pathogen compliant
- » Dual-density polyurethane removable footbed on flexible Bi-Fit™ insole
- » Steel triple-rib ladder shank
- » Thorogood's exclusive Vibram® Fire & Ice ATS All-Terrain Sole
- » Meets NFPA 1971 & 1992
- » Lenzi L-Protection® flexible, non-metallic, puncture-resisting insole
- Composite safety toe
- » Meets ASTM F2413-11





















WE'VE GOT FIREFIGHTING





804-6369 MEN'S 504-6369 WOMEN'S

14" Power HV Structural Bunker Boot

- » Waterproof, flame/cut/abrasion-resisting leather, rubber toe and heel protection » Goodyear storm welt construction
- » BBP X-Stream Waterproof® membrane, blood-borne pathogen compliant
- » Dual-density polyurethane removable
- » Steel triple-rib ladder shank
- » Vibram® Fire & Ice slip-resisting outsole
- » Meets NFPA 1971
- » Lenzi L-Protection® flexible, non-metallic, puncture-resisting insole
- Composite safety toe
- » Meets ASTM F2413-11







MEN'S | M 5-16 | W 5-16 | XW 5-16 | WOMEN'S | N 5-10 | M 5-10 | W 5-10





LEATHER BOOT Made in USA*



- 1 HEAT-RESISTING KEVLAR® thread
- 2 AZTEC LINING to wick away moisture for drier, cooler, healthier feet
- 3 StedAir® waterproof blood-borne pathogen BARRIER
- 4 Removable contoured **CUSHION FOOTBED**
- Non-metallic SAFETY TOE
- 6 Scuff-resisting Vibram® RUBBER TOE for 40% better abrasion resistance
- 7 STEEL TRIPLE LADDER SHANK for superior arch support
- 8 Thorogood's® exclusive Vibram® FIRE AND ICE SOLE with CHISELED EDGE LUGS for better ice traction



Structural CERTIFIED NFPA 1971





Our Made in USA footwear is either Berry Compliant (100% Made in the USA with USA components) or Made in the USA with domestic and globally sourced components.

804-6373 MEN'S 504-6373 WOMEN'S

14" Structural Bunker Boot

- » Waterproof, flame/cut/abrasion-resisting leather with » Thorogood's exclusive Vibram® Fire & Ice outsole scuff-resisting Vibram® rubber toe and heel bumper
- » Goodyear storm welt construction
- » StedAir® PTFE waterproof barrier, blood-borne pathogen compliant
- » Polyurethane removable footbed
- » Steel triple-rib ladder shank
- » Meets NFPA 1971

- with chiseled edge lugs
- » Lenzi L-Protection® flexible, non-metallic, punctureresisting insole
- » Oblique composite safety toe
- » Meets ASTM F2413-11
- » Made in USA*







| MEN'S | M 5-16 | W 5-16 | XW 5-16 | WOMEN'S | N 5-10 | M 5-10 | <mark>W 5-10</mark> |







RUBBER BOOT

Superior protection and comfort.

Structural CERTIFIED

Hazmat **CERTIFIED**

NFPA 1971 NFPA 1992



- » Flame/heat-resisting rubber
- » Vulcanized construction
- » Dupont™ Kevlar® yellow knit one piece liner
- » Removable superknit covered polyurethane footbed
- Stainless steel puncture-resisting bottom plate
- » Steel triple-rib ladder shank
- » Flame/heat-resisting traction lug outsole
- » Meets NFPA 1971 & 1992
- » Blood-borne pathogen compliant
- » Oversized steel toe



MEN'S | M 5-16 | W 5-16 | XW 5-16 | WOMEN'S | N 5-10 | M 5-10 | W 5-10



- » Flame/heat-resisting rubber
- » Vulcanized construction
- » Dupont™ Kevlar® yellow knit one piece liner
- » Removable superknit covered polyurethane footbed
- » Flexible, non-metallic, puncture-resisting sole plate
- » Steel triple-rib ladder shank
- » Flame/heat-resisting traction cleat outsole
- » Meets NFPA 1971 & 1992 » Blood-borne pathogen compliant
- » Oversized steel toe

75 SR WP PR BB EH SF

STRUCTURAL & HAZMAT






- » Vulcanized construction
- » 3.5mm polyester needled felt with heel reinforcement
- » Removable superknit covered polyurethane footbed
- » Stainless steel, puncture-resisting bottom plate
- » Steel triple-rib ladder shank
- » Flame/heat-resisting white traction lug outsole
- » Meets NFPA 1971 & 1992
- » Blood-borne pathogen compliant
- » Abrasion-resisting rubber T-toe
- » Oversized steel toe














MEN'S | M 5-16 | W 5-16 | XW 5-16 | WOMEN'S | N 5-10 | M 5-10 | W 5-10





EMERGENCY WITH A

WILD SIDE

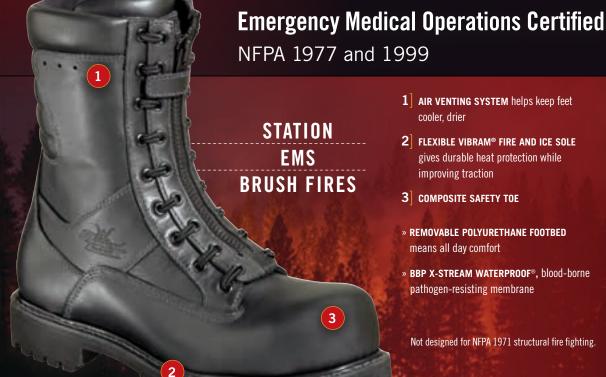

- 1 AIR VENTING SYSTEM helps keep feet cooler, drier
- 2 FLEXIBLE VIBRAM® FIRE AND ICE SOLE gives durable heat protection while improving traction
- 3 COMPOSITE SAFETY TOE
- » REMOVABLE POLYURETHANE FOOTBED means all day comfort
- » BBP X-STREAM WATERPROOF®, blood-borne pathogen-resisting membrane

Not designed for NFPA 1971 structural fire fighting.

804-6379 · 504-6379

804-6379 MEN'S 504-6379 WOMEN'S

9" Waterproof Power EMS / Wildland Boot

- » Waterproof, flame/cut-resisting leather » Goodyear storm welt construction
- » BBP X-Stream Waterproof® membrane,
- blood-borne pathogen compliant
- » Dual-density polyurethane removable
- » Steel triple-ribbed logger shank
- » Vibram® Fire & Ice slip-resisting outsole
- » Meets NFPA 1977 & 1999
- » Lenzi L-Protection® flexible, non-metallic, puncture-resisting insole
- » Composite safety toe
- » Meets ASTM F2413-11
- REPLACEMENT ZIPPER: 884-6641 5-101/2 · 884-6642 11-15





MEN'S | M 5-14,15 | W 5-14,15 | XW 5-14,15 | WOMEN'S | N 5-10 | M 5-10 | W 5-10





FIRESTALKER



First certified **Wildland Hiking Boot** with ATS (All-Terrain Sole)

Combines the performance and comfort of a European hiking boot with the durability of a rugged Wildland boot. Built to withstand the demanding conditions of Wildland firefighting.

- 1 Flame/cut resistant rough-out leather
- 2 Lock-stitched Kevlar® filament thread & Kevlar® laces
- 3 Moisture-wicking REMOVABLE FOOTBED on reinforced Bi-Fit™ insole platform molds to the shape of your foot
- 4 SIDEWALL LUGS provide multi-angle grip on uneven surfaces

Exclusive design of our Vibram® ATS (All-Terrain Sole) tread provides lateral traction on all terrain, all day long.



834-6383 MEN'S 534-6383 WOMEN'S

9" Firestalker Elite Wildland Hiking Boot

- » Flame/cut resistant rough-out leather
- » Removable moisture-wicking footbed on
- » Steel triple-ribbed logger shank
- » Thorogood's exclusive Vibram® Fire & Ice ATS All-Terrain Sole
- » Meets NFPA 1977

SR WF






SOLE 6



FIRE DEVIL WILDLAND BOOT

The Devil's in the Details

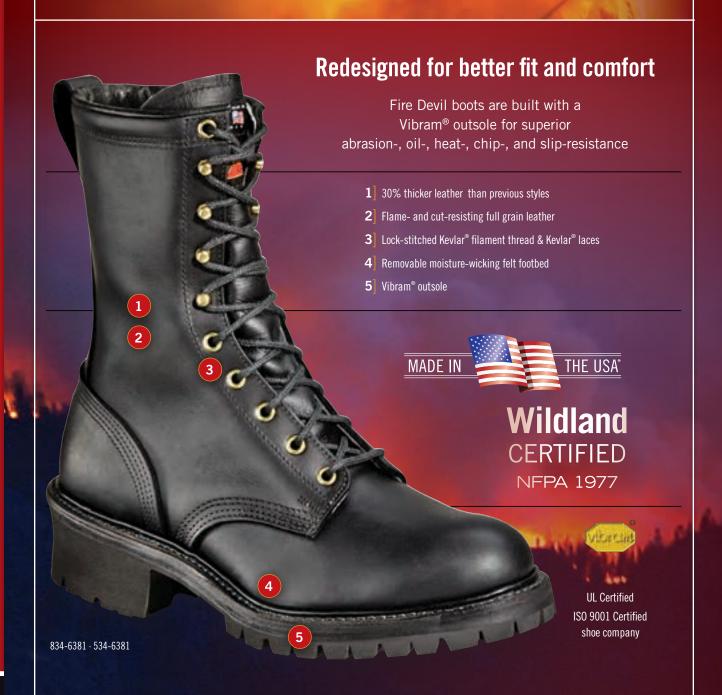





abrasion resistance

attachment

» Improved ergonomic fit hugs your foot


- moisture-wicking footbed

- » Tip stitching ensures secure sole

MEN'S | M 5-13,14,15 | W 5-13,14,15 | XW 5-13,14,15 | WOMEN'S | N 5-10 | M 5-10 | W 5-10







- abrasion resistance
- » Improved ergonomic fit hugs your foot
- » Tip stitching ensures secure sole attachment



- moisture-wicking footbed
- » Vibram® outsole » Meets NFPA 1977
- » Made in USA*





MEN'S | M 5-13,14,15 | W 5-13,14,15 | XW 7-13,14,15 | WOMEN'S | N 5-10 | M 5-10 | W 5-10

SOLE COMPARISONS

KEY A = BEST B = BETTER C = GOOD	SOLE 1	SOLE 2	SOLE 3	SOLE 4	SOLE 5	SOLE 6	SOLE 7
	VIBRAM® ATS Fire and ICE Sole	VIBRAM® FIRE AND ICE SLIP-RESISTING SOLE	EXCLUSIVE VIBRAM® FIRE AND ICE SOLE WITH CHISELED EDGE LUGS	HELLFIRE™ TRACTION LUG	HELLFIRE™ TRACTION CLEAT (CALENDERED)	EXCLUSIVE VIBRAM® ATS FIRE AND ICE SOLE	VIBRAM® FIRE AND ICE SOLE
Abrasion Resistance	Α	Α	Α	А	Α	А	A
Oil Resistance	Α	Α	Α	С	С	А	Α
Heat Resistance	Α	Α	Α	А	Α	А	Α
Chip Resistance	A	Α	Α	A	Α	A	A
Slip Resistance	А	А	А	А	А	А	Α

GENUINE THOROGOOD FOOTBEDS



889-6007 Ultimate Shock-Absorption™ Footbed



MEN'S SIZES

S 7-9 **M** 9½-11 **L** 11½-13 **XL** 14-15



889-6008

Comfort 125 Footbed single-density polyurethane with contour heel cup



Made in USA?

MEN'S SIZES **S** 7-9 **M** 9½-11

WOMEN'S SIZES

11½-13,14

S 6-7½ M 8-9½ L 10-11½



889-7024 Compression Foam Footbed

MEN'S SIZES

XS 5-6½ S 7-8½ M 9-11½ L 12+



889-8000 The Deuce SHOCK ZONE Footbed dual-density polyurethane

MEN'S SIZES

 $\begin{array}{cccc} \textbf{XS} & 4-5\frac{1}{2} \\ \textbf{S} & 6-7\frac{1}{2} \\ \textbf{M} & 8-9\frac{1}{2} \\ \textbf{L} & 10-11\frac{1}{2} \\ \textbf{XL} & 12-13\frac{1}{2} \\ \textbf{XXL} & 14-15 \\ \end{array}$

YKK EYE ZIPPERS

884-6002 884-6642 6-Eye Zippers 9-Eye Zippers Size 11-15 for 584-6002 804-6379 7-Eye Zippers 884-6441 $10\hbox{-Eye Zippers \textbf{AND}}$ 884-6001 (Fire) 7" Zippers 8-Eye Zippers 884-6241 884-6541 10-Eye Zippers AND 8-Eye Zippers (Fire) (Fire) 8" Zippers 884-6641

9-Eye Zippers

Size 5-10½ for 804-6379

884-6341 11-Eye Zippers (Fire)

LIMITED WARRANTY

Weinbrenner Shoe Company, Inc. ("Thorogood Shoes") warrants solely to those consumer purchasers ("purchasers") who, for their own use or use by another consumer end user, purchase the Thorogood® branded products ("Products") directly from an authorized seller ("Authorized Seller") that the Products manufactured by Thorogood Shoes are free from defects in material and workmanship for a period of one year from the date of purchase.

This warranty covers normal use only of the Products. Thorogood Shoes will not assume responsibility for any failure of the Products incurred by misuse, abuse, neglect or exposure to a substance or an environment that degrades the Products. Normal sole wear of the Products is not considered to be a defect in material and workmanship.

Products considered to be defective must be returned to the Authorized Seller from which the Products were originally purchased or issued with the original purchase receipt or issuer's invoice record. Our policy is to honor Product warranties only on Products purchased from an Authorized Seller of Thorogood® Products and only when accompanied by the original purchase receipt or proof of purchase. If Products are purchased from an unauthorized seller this limited warranty will not be valid.

Defective Products will be repaired or replaced at the discretion of Thorogood Shoes. Any replacement will be for the same style and size of the returned defective footwear Products.

This is a limited warranty. The obligations set forth in the preceding paragraphs are Thorogood Shoes' sole obligation and the purchaser's exclusive remedy. Thorogood Shoes makes no other express warranty. Any implied warranty of merchantability or fitness for a particular purpose that may be applicable to the Products is limited in duration to the duration of this limited warranty. Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

Thorogood Shoes shall not be liable for any direct, or indirect, incidental or consequential damages even if it has been advised of possibility of such damages. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This limited warranty shall be governed by, and construed and interpreted in accordance with, the local laws of the State of Wisconsin (without application of its conflicts of laws principles), except only to the extent replaced or precluded by other law of mandatory application. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State

RETURNED GOODS POLICY

Inspection Requirement- Weinbrenner is committed to quality. Upon receipt of Products from Weinbrenner, Dealer shall inspect the Products for damage and defects. Products that are damaged or otherwise defective must be removed from inventory and either returned to Weinbrenner or repaired prior to being offered for sale to end-user customers

Defective Merchandise- No written permission is required for Dealer's return of up to 6 pair of defective merchandise. Please contact Customer Service for returns over 6 pair. Credit will be issued on footwear with defective workmanship or materials. Credit may be pro-rated based on the general condition and length of wear. If footwear has been abused, cut, punctured, scraped or used for unintended purposes, the policy is not in force. WE DO NOT ACCEPT RETURNED FOOTWEAR DIRECTLY FROM THE CONSUMER. When a defect is minor, eyelet, hook, D-Ring, or rivet replacement, seam stitching, sole or heel reattachment, etc., your customer may be happy with a quick and inexpensive repair. Weinbrenner will reimburse dealers up to \$15.00/pair for such repairs done at a local shoe repair shop. Send a paid receipt to WSC Customer Service for reimbursement/credit.

Non-Defective Merchandise- Prior written permission is required on any return of non-defective merchandise. Contact your sales representative.

PRODUCT CHANGE NOTICE

This Thorogood catalog is accurate as of the date of printing. However, in our never ending pursuit of better materials and construction there may be product specification changes made during the year without notice. The Thorogood price list is your official list of stock numbers available.

THOROGOOD®, THE ULTIMATE®, ULTIMATE SHOCK-ABSORPTION™, SOFT STREETS™, I-MET®, HELLFIRE™, and SHOE IN® are registered trademarks of the Weinbrenner Shoe Company, Inc.

- VIBRAM® and the Yellow Octagonal Label are registered trademark of Vibram S.p.A. of Italy. Quabaug Corporation, North Brookfield, MA, is the North American manufacturer of Vibram soling products under exclusive license
- KEVLAR® is a registered trademark of DuPont.
- 3M™ THINSULATE™, THINSULATE™ ULTRA, and SCOTCHLITE™ are trademarks of 3M™.
- PORON® is a registered trademark of Rogers Corporation.
- . DRI-LEX® is a registered trademark of Faytex Corporation.
- MAXUM® is a registered trademark of Meramec Group.
- COOLMAX® is a registered trademark of Invista.
- L-PROTECTION® is a registered trademark of Lenzi Egisto S.p.A.
- · GORE-TEX®, GUARANTEED TO KEEP YOU DRY®, GORE®, and designs are trademarks of W. L. Gore & Associates, Inc.

KEY

To make your selection easier, we have included symbols that call your attention to important features built into the shoes throughout this catalog. Tested and certified to meet the rigid standards established by the American Standard Test Method (ASTM), all of our safety footwear meets or exceeds the highest ASTM F2413-11 or ASTM F2892-11 ratings (where applicable).



*Weinbrenner Shoe Company manufactures our Made in USA footwear at its two union factories in Wisconsin. Our Made in USA footwear is either Berry Compliant (100% Made in the USA with USA components) or Made in the USA with domestic and globally sourced components. Our Built in USA footwear uses all American hides and is assembled at our two union factories in Wisconsin.

BC BERRY COMPLIANT (100% USA MADE)

Made in the USA with USA components.

BB BLOOD-BORNE PATHOGENS

Thorogood BBP X-Stream Waterproof® and Stedair™ linings are blood-borne pathogen penetration compliant, for at least one hour when tested according to ASTM F 1671, Standard Test Method for Resistance of Materials used in Protective Clothing.



COMP 75 SAFETY TOE

Composite safety toe caps provide the same protection as steel, but are non-metallic, corrosion resistant, transmit less cold and weigh less.



Engineered with GORE-TEX® product technology. Durable waterproof, windproof, and breathable protection for optimized comfort, guaranteed.

IMPACT

Class I/75 footwear retains a .500 inch (1/2 inch) for men's and .468 inch (15/32 inch) for women's or greater clearance after a nominal impact of 75 foot-pounds (101.7J), i.e., a 50 pound weight dropped, reaching 117.9 ± 2.4 inches per second velocity at impact. COMPRESSION: Class C/75 footwear retains a .500 inch (1/2 inch) after compression of 2500 lbs. (11,121 N) or greater.

EH ELECTRIC HAZARD RESISTANT FOOTWEAR

Constructed or manufactured with electric shock-resisting soles and heels capable of withstanding an application of 18,000 volts (root mean square (RMS) value) at 60 Hz for 1 minute with no current flow or leakage current in excess of 1.0 milliamperes under dry conditions.

XW 5-10 EXTENDED SIZES AND WIDTHS

are indicated by a yellow highlight.

I-M I-MET PATENTED TECHNOLOGY

A breakthrough in metatarsal protection, exclusively from Thorogood® features the only internal, invisible, Metatarsal Guard that's completely integrated with the safety toe cap.

I-M² I-MET² Patented Technology

Exclusively from Thorogood® Footwear. The polymer compound used in the I-MET2® absorbs and deflects impact to the instep of the foot. Like the original I-MET®, I-MET2® is an internal, invisible, Metatarsal Guard that's completely integrated with the protective toe cap.



Featuring 3M[™] Thinsulate[™] insulation

Thinsulate Ultra INSULATED

3M Thinsulate Ultra $^{\scriptscriptstyle\mathsf{TM}}$ contains a minimum of 400 grams+ of 3M™ Thinsulate Ultra Insulation throughout.

MT METATARSAL

Class ASTM F2413-11 Mt/75 footwear retains a 1.0 inch clearance for men's and .937 inch clearance for women's, after a nominal impact of 75 foot pounds (101.7J), i.e., a 50 lb. weight dropped, reaching 117.9 ± 2.4 inches per second velocity at impact 3.5 inches in from the toe of the footwear (3.375 inches on women's).

NM NON-METALLIC UPPER

These styles are 100% non-metallic utilizing composite toes and non-metallic hardware (eyelets). These features will help minimize the chance of marking / scratching work surfaces and will not activate security screening devices.

PC POSTAL CERTIFIED

Footwear bearing the SR/USA label have been manufactured according to USPS 89D and meet sole slip-resistance (ASTM F 489), domestic source end product, water resistance (ASTM D 2099) requirements. They are Certified by the US Postal Service and Department of Navy, Navy Clothing, and Textile Research Facility.

PR PUNCTURE-RESISTING

Puncture-resisting through the sole and heel area at a force load of 1200N (270 lbf). Unique textile insole material is flexible and puncture-resisting.

SR SLIP-RESISTING

Footwear is tested for ASTM F2913-11 SATRA Test Method TM144 (or Mark II) industry criteria for slip-resisting footwear.

SD STATIC DISSIPATIVE

SD Footwear will provide for a resistance of between 10 to the 6th power ohms (1 megohm) and 10 to the 8th power (100 megohms) resistance when 50 volts are applied via an electrode to the hand of a person wearing the SD test sample on a conductive ground plate.

STEDAR® StedAir® PTFE Waterproof Barrier blood-borne pathogen compliant

STRUCTURAL & HAZMAT

Complies with NFPA 1971 & 1992

SF STRUCTURAL FIRE FIGHTING

Meets the requirements of NFPA 1971 Standard on Protective Ensemble for Structural Fire Fighting, 2013 Edition.

ULTRA LIGHT

ULTRA LIGHT Lightweight materials and construction designed with foot comfort in mind.

WATERPROOF WP

Waterproof barrier keeps water out.

Waterproof, breathable membrane keeps feet dry while instantly venting moisture and body heat.

waterproof, breathable membrane keeps feet dry and comfortable. Blood-borne pathogen penetration compliant.

WF WILDLAND FIRE FIGHTING

Meets the requirements of NFPA 1977 Protective Clothing and Equipment for Wildland Fire Fighting, 2016 Edition.











THOROGOOD®

108 S. POLK STREET · MERRILL, WISCONSIN 54452 1-800-826-0002